

(30) Priority data:

M192A000404

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



' INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5: WO 93/17169 (11) International Publication Number: A1 D06F 58/24 (43) International Publication Date: 2 September 1993 (02.09.93)

IT

PCT/EP93/00112 (21) International Application Number:

(22) International Filing Date: 19 January 1993 (19.01.93)

(71) Applicant (for all designated States except US): ANTONIO MERLONI S.P.A. [IT/IT]; Via Vittorio Veneto, 116, I-

60034 Fabriano (IT).

(72) Inventor; and (75) Inventor/Applicant (for US only): MERLONI, Antonio [IT/IT]; Via Vittorio Veneto, 116, I-60044 Fabriano (IT).

(74) Agent: FORATTINI, A.; Internazionale Brevetti, Ingg. Zini Maranesi & C. S.r.l., Piazza Castello, 1, I-20121 Milano (IT).


(81) Designated States: JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: WATER-SAVING DEVICE FOR WASHING-DRYING MACHINES

25 February 1992 (25.02.92)

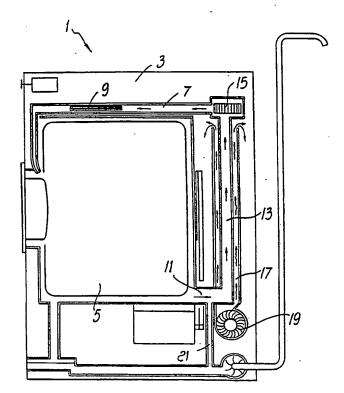

(57) Abstract

A washing-drying machine equipped with a water-saving device including a duct (17) for cooling the air-circulation condenser (13). Consumption of water during the drying of the laundry is thus totally eliminated or substantially reduced.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
ΑU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	ΙE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada .	ЯĽ	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	รม	Sudan
.CG	Congo		of Korua	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SK	Slovak Republic
CI	Côte d'Ivoire	KZ	Kazakhstan	SN	Senegal
CM	Canteroon	LJ	Liechtenstein	รบ	Soviet Union
cs	Czechoslovakia -	LK	Sri Lanka	TD	Chad
CZ	Czech Republic	1.U	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	UA	Ukraine
DK	Denmark	MG	Madagascar	US	United States of America
ES	Spain	MI.	Mali	VN	Viet Nam
FI	Finland	MN	Mongolia	* 1.7	. 7101 (1811)

1

WATER-SAVING DEVICE FOR WASHING-DRYING MACHINES

The present invention relates to a water-saving device for washing-drving machines.

5

10

Machines termed washing-drying machines with closed-cycle air circulation are known which comprise an air circulation device which starts to operate at the end of the washing cycle and after spin-drying, for drying the laundry completely.

Various air circulation devices are known. In a first type, the air enters the tank, where the laundry is heated by a radiating element, removes the moisture, passes through the holes of the drum along the discharge ducts, and then rises up to the fan, which pushes the air back into the tank. The air, by passing through the warm laundry, removes the moisture and, by passing through the discharge duct, makes contact with the cooling water and consequently deposits the moisture. This cycle is repeated for approximately 100-120 minutes until the laundry is perfectly dry.

In a second type of known device, the air is pushed by a fan in contact with a resistor which heats it. The air is then fed into the drum, where, in contact with the wet laundry, it becomes loaded with moisture. This moisture-rich air then passes in a condenser, which is kept humid and cold by a jet of water, and deposits the moisture inside said condenser.

30 Other systems, which are substantially similar to those

2

described above, provide for the feeding of air and heat into the laundry, which yields its moisture to the air. The air is fed into a condenser (which is kept cold by water), where said air releases its moisture. By repeating the cycle for a certain time, the laundry is dried.

An essential component of these drying systems is the condenser, where the air, in contact with the cold water, releases its moisture.

10 The condenser is generally constituted by a substantially vertical duct, wherein the current of warm and moist air coming from the lower end is intercepted by a film of water coming from the upper end. The film of water cools the warm air causing the condensation of the moisture.

15

The water also captures and removes the fluff, which has deposited on the duct walls. This fluff is then disposed of together with the discharge water.

20 The water thus acts as cooling means and as means for washing the condensation ducts in known drying systems.

Since in conventional machines the drying cycle is rather long, from at least 70 minutes up to 120 minutes, there is a considerable consumption of water, generally from 40 to 70 liters for each drying cycle.

The aim of the present invention is to provide a washing-drying machine which has a considerably lower water consumption than known machines.

This aim, these objects and others which will become apparent hereinafter are achieved by a water-saving device for washing-drying machines, which comprises a condenser element connected to the tank of the machine, aspirator means connected to said condenser so that the moist air which is present in said tank is fed into said condenser and subsequently fed into said tank, characterized in that it comprises a cooling duct arranged adjacent to said condenser element, and ventilation means adapted to generate a flow of air in said cooling duct so as to cool said condenser in order to condense the moisture of said air fed into said condenser.

- 15 Further characteristics and advantages will become apparent from the description of a preferred but not exclusive embodiment of the invention, illustrated only by way of non-limitative example in the accompanying drawings, wherein:
- 20 Figure 1 is a sectional side view of a washing-drying machine according to the invention, having an external cooling duct;

Figure 7 is a view, similar to the preceding one, of a machine amcording to another aspect of the invention, having an internal cooling duct;

Figure 3 is a view, similar to the preceding one, of a machine according to a third aspect of the invention, having a dual internal and external cooling duct;

25

4

Figure 4 is a view, similar to the preceding ones, of a machine according to a fourth aspect of the invention, having a dual cooling duct and with an auxiliary condensation water device.

5

With reference to the above figures, a washing-drying machine 1 generally comprises a supporting structure 3 for a tank 5 containing the laundry to be washed and dried.

10 The drying and air circulation system comprises a hot-air delivery duct 7 and an electric resistor 9 for heating the air fed to the tank, in a per se known manner.

The machine comprises an aspiration duct 11 connecting the 15 tank 5 to a condenser 13. Condenser 13 is connected to an aspirator 15 and to the delivery duct 7, in a per se known manner.

A discharge duct 21 is connected to the tank 5, in order to 20 discharge the water, and to the condenser 13.

With particular reference to figure 1, the machine according to the invention comprises a cooling duct 17 which is external and coaxial to the condenser 13. The duct 17 has a 25 fan 19 for generating an air current in the cooling duct.

Figures 2-4 illustrate different embodiments of the watersaving device according to the invention, which is based on the elimination or substantial reduction of the use of water to cool the condenser. The same numerals designate common or

5

substantially similar elements in the different embodiments illustrated.

Figure 2 illustrates a machine 101, substantially identical to the machine 1, wherein the cooling duct 117 is internal and coaxial to the condenser 113.

Figure 3 illustrates a machine 201, similar to the preceding ones and having a dual cooling duct. The dual cooling duct is constituted by an external duct 217a and by an internal duct 217b. Both ducts 217a, 217b are coaxial to the condenser 213.

Figure 4 instead illustrates a machine 301 having a dual cooling duct 317, similar to the one of the machine shown in 15 Figure 3. Duct 317 is coaxial to the condenser 313 and comprises an auxiliary cooling device constituted by a nozzle 323 for generating a film of cooling water inside the condenser 313.

The described machines can also be equipped with a device, for cleaning the condenser and the discharge duct, for example, similar to the one described in the Italian patent no. 1217490 in the name of this same Applicant. Said device essentially comprises a jet of cleaning water with a relatively high flow rate.

In practice it has been observed that the invention achieves the intended aim and objects, a saving device having been provided which allows an enormous reduction in water consumption in washing-drying machines.

30

The cooling of the condenser by means of an air-circulation cooling duct, optionally with the aid of a reduced use of water in the condenser, allows to substantially reduce or even completely eliminate the use of water during the drying of the laundry.

The device according to the invention is susceptible to numerous modifications and variations, all of which are within the scope of the inventive concept; all the details may furthermore be replaced with technically equivalent elements.

The materials employed, as well as the dimensions, may naturally be any according to the requirements and the state of the art.

Where technical features mentioned in any claim are followed by reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly, such reference signs do not have any limiting effect on the scope of each element identified by way of example by such reference signs.

7

CLAIMS


- 1. Water-saving device for washing-drying machines, comprising a condenser element (13) connected to the tank (5) of the machine, aspiration means (15) connected to said condenser so that the moist air which is present in said tank is fed into said condenser and then fed into said tank, characterized in that it comprises a cooling duct (17) arranged adjacent to said condenser element, and ventilation means (19) adapted to generate a flow of air in said cooling duct so as to cool said condenser in order to condense the moisture of said air which is fed into said condenser.
- 2. Device according to claim 1, characterized in that said cooling duct (117) is coaxial and internal to said condenser (113).
- 3. Device according to claim 1, characterized in that said cooling duct (17) is coaxial and external to said condenser 20 (13).
 - 4. Device according to claim 1, characterized in that said cooling duct is constituted by an internal tube (217b) coaxial to said condenser (213) and by an external tube (217a) coaxial to said condenser (213).
 - 5. Device according to claim 1, characterized in that it comprises an auxiliary condensation device (323) adapted to generate a thin film of water inside said condenser (313).

25


10

8


6. Device according to claim 1, characterized in that it comprises a discharge duct (21), said duct being connected to said tank (5) and to said condenser element (13), and characterized in that it comprises a device for cleaning said discharge duct, said cleaning device comprising a jet of water fed into said discharge duct.

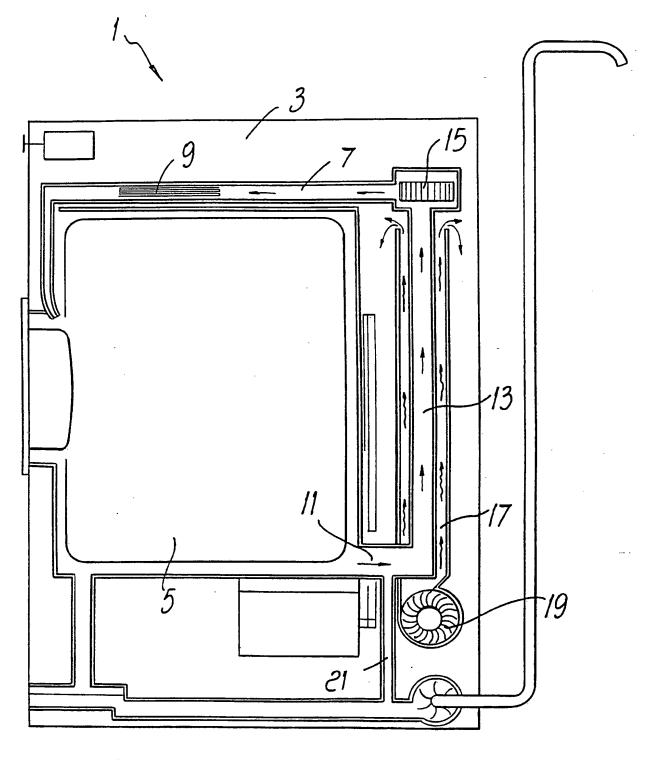


F19.1

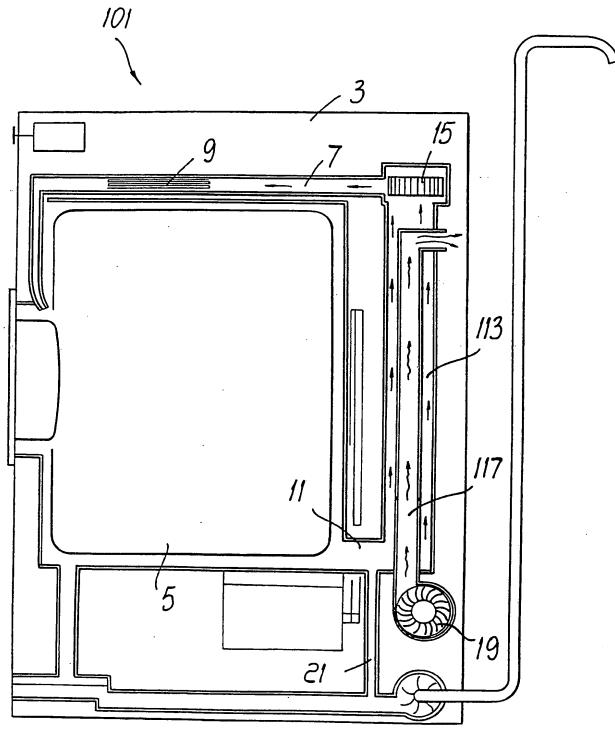

F19.2

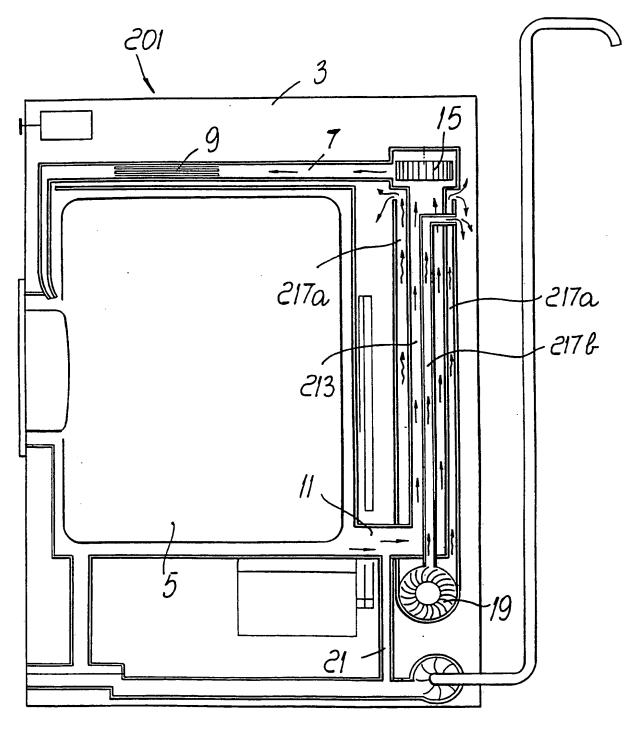

F19.3

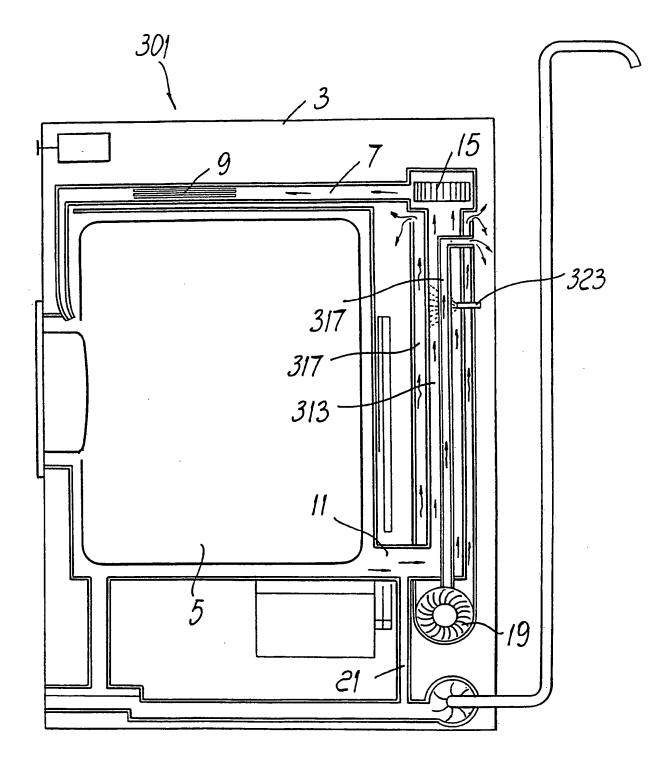

F19.4

International Application No

I. CLASSI	IFICATION OF SUBJ	ECT MATTER (if several classification s	manale analy indicate all 6	
		t Classification (IPC) or to both National C		
	1. 5 D06F58/2		Assification and IPC	
1	. 5 5001 50, 2	7		
n erei n	C CE ADGRED			
II. PIELUS	S SEARCHED			
C1			entation Searched ⁷	
Classifica	ation System		Classification Symbols	
Int.Cl	, , ,	D06F		
1	,	1 0001		
<u> </u>				
		Documentation Searched other		
		to the Extent that shell Documents a	are Included in the Fields Searched ⁸	
l				
		ED TO BE RELEVANT 9		
Category °	Citation of Do	ocument, 11 with indication, where appropris	ate, of the relevant passages 12	Relevant to Claim No.13
Х	NO A D (ADD DES /74NVED OMBIL B		
^	9 August	008 851 (ZANKER GMBH & :	co)	1,2
ĺ		ims; figures		
X,P	EP,A,0 4	481 178 (ZANKER GMBH)		1-3
	22 April	1 1992		
!	see colu	umn 3, line 37 - column	4, line 5	
. !	see colu figures	umn 4, line 35 - column	5, line 28;	
ļ	rigures			
X	GB, A, 2 (097 519 (LICENTIA		1
	PATENT-V	VERWALTUNGS-GMBH)		
1	3 Novemb	ber 1982	•	
Ì	see the	whole document		
х	CP A 2 C	NOC 147 /I TOENTTA		_
^	DATENT-	026 147 (LICENTIA VERWALTUNGS-GMBH)		1
		ary 1980	•	
		tract; figure	!	
			-	
			-/ ·	
	al categories of cited doc		"T" later document published after the interna	tional filing date
"A" doc	cument defining the gene nsidered to be of particul	eral state of the art which is not plar relevance	or priority date and not in conflict with the cited to understand the principle or theory	e application but underlying the
"E" earl		shed on or after the international	invention "X" document of particular relevance; the clair	med invention
"L" doci	cument which may throw	w doubts on priority claim(s) or	cannot be considered novel or cannot be co involve an inventive step	onsidered to
Which	ich is cited to establish t ation or other special rea	the publication date of another	"Y" document of particular relevance; the claim	ned invention
"O" doc		oral disclosure, use, exhibition or	cannot be considered to involve an inventi- document is combined with one or more of	ther such docu-
"P" doci	cument published prior to	to the international filing date but	ments, such combination being obvious to in the art.	•
late	ter than the priority date	claimed	"&" document member of the same patent fami	ily
IV. CERTIF	FICATION			
Date of the	Actual Completion of th	ne International Search	Date of Mailing of this International Search	th Report
	17 M	MAY 1993	04. 06. 93	
International	al Searching Authority		Signature of Authorized Officer	
	EUROPEA	N PATENT OFFICE	COURRIER G.L.A.	

III. DOCUME	International Application No CUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)			
Category o	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.		
X	DE,A,3 311 077 (LICENTIA PATENT-VERWALTUNGS-GMBH) 4 October 1984	1		
x	see abstract; figures			
^	EP,A,O 163 265 (MIELE & CIE. GMBH.) 4 December 1985 see claims 3,4; figure 3	1		
X	DE,A,3 738 031 (BOSCH-SIEMENS HAUSGERÄTE GMBH) 18 May 1989 see abstract; figures	1,6		
4	GB,A,1 247 788 (A. ZANUSSI S.P.A.) 29 September 1971 see the whole document	1,5,6		
į.				
	•			
	·			
	• 			
- 1		1		

Form PCT/ISA/210 (extra sheet) (January 1985)

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

ΕP 9300112 SA 69772

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17/0

17/05/93

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO-A-9008851	09-08-90	DE-A- DE-A- EP-A- JP-T- US-A-	3903184 3904988 0411080 3503019 5136792	16-08-90 09-08-90 06-02-91 11-07-91 11-08-92
EP-A-0481178	22-04-92	DE-A-	4032904	23-04-92
GB-A-2097519	03-11-82	DE-A- NL-A-	3115704 8201412	04-11-82 16-11-82
GB-A-2026147	30-01-80	DE-A- NL-A-	2831932 7905127	07-02-80- 22-01-80
DE-A-3311077	04-10-84	None		
EP-A-0163265	04-12-85	DE-A-	3419743	28-11-85
DE-A-3738031	18-05-89	. None		
GB-A-1247788	29-09-71	None		